

GLI-METRO

The "Smart" GPS Amplifier



KEY FEATURES

- » Precise control over output signal level
- » Passes L1 (L1/L2 optional)
- » High frequency selectivity
- » Power Always ON or Power ON/OFF
- » Perfect for any automated test environment and/or in a shielded room

AVAILABLE OPTIONS

- » Passive Antenna
- » Active Antenna
- » Swivel Mount
- » COPRO Surge Protector
- » Antenna monitor
- » C240 coaxial cable
- » Power Supply AC & DC
- » Filter L1/L2
- » Bluetooth
- » Pole Mount

Complete ready-to-use system is also available to qualified parties. Call for details.

ONLY AVAILABLE TO APPROVED / LICENSED ENTITIES:

- » Federal Government or agencies operating under the direction of the Federal Government
- » Parties that have received an STA or Experimental License under part 5 of the FCC rules
- » Parties operating in an anechoic chamber



INTRODUCTION

GPS Source's GLI-METRO marks the integration of the latest GPS smart amplifier technology into a self-contained unit. A smart amplifier, with a simple user interface, it is perfect for the commercial and public sector. It can help anyone working in an automated test environment or in a shielded room that needs the GPS signal, safely bring the GPS signal inside. Derived from high performance systems for military applications, the GLI-METRO device features L1 GPS Signals (optional L2 for approved applications) and oscillation detection/mitigation.

PRECISE CONTROL

With the GLI-METRO, the user has control over effective radiated power (ERP) levels. This is regardless of the uncertain loss or gain in the receive antenna cable network. It is smart enough to automatically condition the signal and prevent changes in performance. With an optional Bluetooth wireless interface also available, it may be configured remotely.

OSCILLATION DETECTION & AUTOMATIC MITIGATION

The GLI-METRO prevents system oscillation that can occur as a result of improper installation or operation. If the GLI-METRO detects oscillation, it will independently reduce the system gain. Even if the GLI-METRO is improperly installed or operated incorrectly, it will still prevent system oscillation.

BUILT-IN TROUBLESHOOTING

The GLI-METRO will identify and isolate the following:

- Oscillation condition
- High gain
- Low gain
- Short/Open circuit
- Internal component failure
- Less than four satellites
- No satellites with adequate signal
(call for complete list of conditions)





Specifications

OUTPUT PORTS

- » Number of ports 1

ELECTRICAL SPECIFICATIONS


- » Input/Output impedance 50Ω
- » SWR all ports (typical)
 - Input: 2:1
 - Output: 2:1
- » Bandwidth
 - L1 1575.42±15 MHz
- » Gain (typical) 0-55dB
- » Gain flatness <3 dB
- » Noise figure <3 dB
- » AC input level
 - 110 VAC
 - 230VAC UK
 - 230VAC European
- » DC input level 12 - 28 VDC
- » Active Antenna Output Power Supply Output 6.8V

REPEATER NOTICE: Due to current regulatory considerations, GPS Repeater kits are only available for sale to: International Customers (outside the U.S.), agencies of the US Federal Government, parties operating under the direction of the US Federal Government, or parties that have received an STA or Experimental License under part 5 of the FCC rules, or parties that will be operating GPS Repeaters in a shielded room.

GLI-METRO Specifications

PHYSICAL SPECIFICATIONS

- » RF connectors
 - N (m, f)
 - SMA (m, f)
 - TNC (m, f)
 - SMB (f)
 - SMC (f)
 - BNC (m, f)
- » RS232 serial connector DB9(F) DCE
- » Weight 1.1 lbs (499 g)
- » Size: 5.87" x 3.15" x 1.9"
(149.1mm x 80mm x 48.3mm)
- » Operating temperature -40 to +85°C

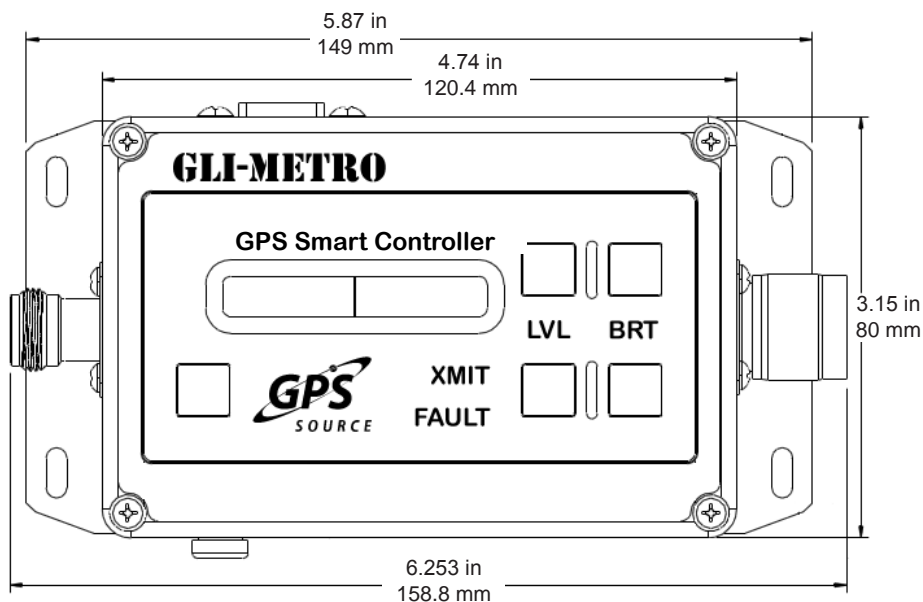

GPS LIVE INSIDE

www.gpssource.com

64 N. Mission Drive | Pueblo, West, CO 81007 | T: 719.561.9520 | F: 719.565.0890 | sales@gpssource.com

An AS9100 Certified Company